

IFE 65" 4K INTERACTIVE DISPLAY



10 POINT IR TOUCH

4K

4K UHD



16/7 USAGE




ANTI-REFLECTIVE

VESTEL

Interactive **10 point touch** solution, designed to help enrich learning and collaboration experiences. The 4K (UHD) display offers **super crisp imagery**, whilst allowing the flexibility to use external devices, or built in features.

IFE

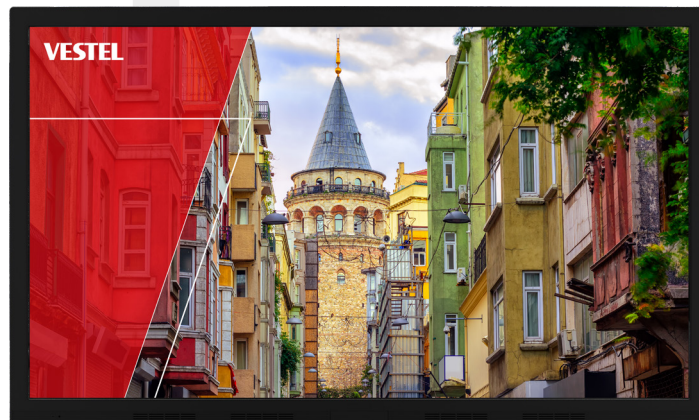

IFE 65" 4K INTERACTIVE DISPLAY



10 POINT IR TOUCH

4K

4K UHD



16/7 USAGE



ANTI-REFLECTIVE



HDMI



PIXEL SHIFT



AUTO-LAUNCH



SCHEDULER

PANEL	
	IFE65
Screen Size	65"
Backlight Type	DLED
Brightness (typ.)	350 cd/m ²
Native Resolution	3840x2160 (UHD)
Contrast Ratio (typ.)	4000:1
Dynamic Contrast	40000:1
Panel Lifetime (min.)	30000 Hours
Response Time (typ.)	8 ms
Active Area (HxV)	1429x804 mm
Viewing Angle	178 Vertical, 178 Horizontal
Colour Value	16.7M (8-Bit)
Orientation	Horizontal
Operation Hours	16/7
Area of Usage	Indoor
TOUCH TECHNOLOGY	
	IFE65
Type	IR
Supported Points	10 Point
Sensitivity	Any Touch with finger, gloved hand or pointer
Connectivity	HID, TUIO, Flash
Supported OS	Windows, Mac OS, Linux, Android
Orientation	Landscape Support
Accuracy	90%
Reporting Rate	Up to 450 fps
Glass Type	Anti Glare 4mm Tempered
Frame Rate	Up to 450 fps
Touch Accuracy	+/- 2mm (over 90% area)
Object Sizes	5 mm
CONNECTIVITY	
	IFE65
RBG Input	1 x VGA
Video Input	1 x HDMI, 1 x USB type B for Touch input
Audio Input	Line In 3.5mm Jack
Audio Output	Line Out 3.5mm Jack

MECHANICAL	
	IFE65
Product Dimensions	1525Wx115Dx915H mm
Packaging Dimensions	1756Wx265Dx1100H mm
Product Weight	41.5 kg
Packaged Weight	46 kg
VESA Mounting	400x400 mm (M6)
Bezel Width	B:56 T:41 L/R: 41 mm
ENVIRONMENTAL CONDITIONS	
	IFE65
Operating Temp.	0-40°C
Operating Humidity	10-90%
POWER	
	IFE65
Supply	110v AC - 240v AC 50/60 Hz
Deep Standby	≤0.5 W
ACCESSORY	
	IFE65
Standard	QSG, Power cable, Remote Control, 2 x AAA Battery
FEATURES	
	IFE65
Mechanical	Front control Panel, IR sensor, Touch function toggle
Speaker	2 x 10 W

